

# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH




### GENERAL INFORMATION

Product Code	9050816
Product Category	Floodlights
Product Family	Grotto
Mounting Location	Ground/Wall
Application Environment	Outdoor

### DIMENSION & WEIGHT

LxWxH (cm)	L:38.2 W: 3.6 H: 28.4
Cut out (cm)	-
Weight (Kgr)	1.87

### TECHNICAL DRAWING

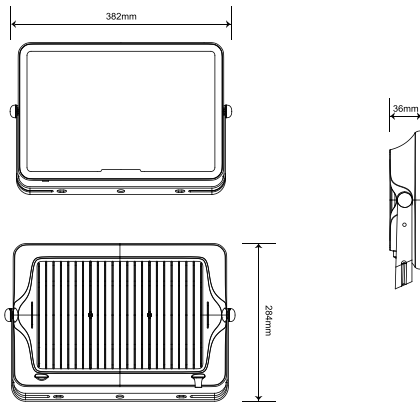

### MATERIAL & COLOR

Product Color	Black
Body Material	Aluminium
Cover Material	N/A

### APPLICATION & MOUNTING

Ambient Working Temp.	Max 40 °C
Type of Protection	IP66
Protection Class IK	IK06
Dimmable	N/A
Type of Dimming (Optional)	N/A
Mounting type	Surface
Mounting Depth (cm)	N/A
Led Module Replaceable	No
Light Source	Led

### COMPATIBLE WITH

- On/Off Driver: Included
- Triac Driver: N/A
- Dali Driver: N/A

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

Power (Nominal)	<b>150W</b>
Input voltage (Nominal)	<b>220-240Vac</b>
Mains Frequency	<b>50/60Hz</b>
Output voltage	<b>N/A</b>
Output Current	<b>N/A</b>
Power Factor	<b>0.9</b>
Efficiency	<b>N/A</b>
SVM	<b>N/A</b>
Pst	<b>N/A</b>
Class	<b>I</b>

### PHOTOMETRICAL DATA

Luminous Flux	<b>15000lm</b>
Luminous Efficacy	<b>100lm/w</b>
Color Temperature	<b>4000K</b>
Light Color (Designation)	<b>Neutral White</b>
CRI	<b>&gt;80</b>
Step MacAdam	<b>&lt;6</b>
Beam Angle	<b>120°</b>
UGR	<b>N/A</b>

### LIFESPAN

Lifetime	<b>30000h</b>
----------	---------------

### CERTIFICATES

Certificates	<b>CE</b>
--------------	-----------

### WARRANTY

Warranty	<b>5 years</b>
----------	----------------

### LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

